

ON-PBD-705W



Line Voltage OS-NET Button

Flexibility • Functionality • Simplicity



OVERVIEW

The ON-PBD-705W is an optional device of IR-TEC's OS-NET wireless mesh network solution. This device is exclusively designed to replace an existing wall switch/dimmer to broadcast manual on/off/dim control commands to the assigned group lighting, while also function as a network node.


This sleek, low profile OS-NET device can be mounted into a standard NEMA wall box, operated by line voltage power, and provide wireless control to the grouped lighting as required. Each ON-PBD-705W can be assigned to control up to 4 lighting groups via a 2-way handheld remote programmer.

A short press at upper/lower position of the button will transmit a command to switch on/off the lighting of groups assigned. Press and hold at upper/lower position of the button will increase/decrease the output level of controlled lighting respectively. A screwless snap-on Decora wall plate is supplied to create a modern, high-end appearance for all spaces. By grouping the ON-PBD-705W with OS-NET sensors, you can effortlessly achieve an energy-efficient, code-compliant smart lighting control through a state-of-the-art wireless sensor mesh network with manual controls capability for presentation or special event.

FEATURES

- 120/277VAC line voltage power operating
- Low profile mounting with standard NEMA box
- Screwless snap-on Decora wall plate supplied
- Built-in LED to indicate device status
- Can be assigned to control up to 4 lighting groups

DIMENSIONS

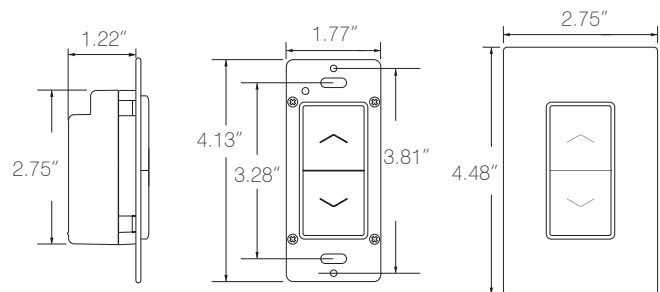

SPECIFICATIONS

Power voltage	120/277VAC, 50/60 Hz
Wireless protocol	Modified Zigbee Light Link (ZLL)
Radio frequency	2.4 GHz
Radio range	Typical 50 ft. @indoor
Radio Power output	2.27 dBm
Op. humidity	Max 95% non-condensation
Op. temperature	14°F ~ 122°F (-10°C ~ 50°C)
Dimensions	4.13"H x 1.77"W x 1.65"D (w/mounting plate)

WIRING DIAGRAM

