

MRD-510 series

SmartDALI Occupancy Sensor



OVERVIEW

The MRD-510 series member of the TRANS family is a two-way IR remote programmable DALI occupancy sensor featuring bi-level StepDIM or continuous SmartDIM control to lighting with DALI driver or ballast. The sensor can be powered by either line voltage or DALI bus to provide multi-scheme occupancy sensing control through DALI Broadcast commands.

The sensor will command DALI drivers to provide the programmed output when it detects the presence of an occupant or vehicle, and automatically dim to the low level or shut off the light after the area is vacant for a period of time. An exclusive two-way handheld remote programmer allows you to configure sensor control scheme and settings, or download the existing settings of the installed sensor from the floor.

Like all sensors in the TRANS family, the MRD-510 series can be directly integrated or attached to a luminaire. Additionally, the sensor can be flexibly mounted on the ceiling by combining specific mounting brackets. Interchangeable lens options provide different coverages for the sensor mounted at different heights. This innovative modular design provides second-to-none application and installation flexibility.

FEATURES

- Omni-directional digital pyroelectric infrared sensor
- Digital data control ALS for daylight harvesting
- Available with AC line voltage or DALI bus power
- DALI broadcast command for multi-driver control
- Slave mode available for reporting movement signal
- Multi-level high/low StepDIM or SmartDIM control
- Exceptionally long remote programming range
- Provides up to 100 mA of DALI bus power supply
- Flexible fixture integration or ceiling mount options
- Interchangeable lens options for all applications

APPLICATION

DALI Lighting Control

The MRD-510 series occupancy sensor can be used to directly control a DALI driver or ballast in different modes by sensing the presence and movements of the occupant. One sensor can control multiple DALI luminaires in the same scheme, while one DALI luminaire can only be controlled by a single sensor.

APPLICABLE REMOTE (order separately)

Model	Description	Remarks
SRP-280	TRANS Remote Programmer	Full functionality
URP-100	User Remote	Manual ON/OFF/DIM TIME/LUX setting

MRD-510 series SmartDALI Occupancy Sensor

CONTROL MODES

The sensor can be easily programmed to control the light in one of the following modes via remote programmer.

Mode	Day ¹	Night ²	Remarks
ON/OFF	Vac: OFF Occ: ON/OFF*	Vac: OFF Occ: ON	For non-dimmable lighting *ALS enabled
OSO	Vac: LD Occ: SD/HD	Vac: LD Occ: SD/HD	LD: Low Dim, HD: High Dim SD: SmartDIM
OSLA	Vac: OFF Occ: SD/OFF	Vac: LD Occ: SD/HD	
OSLATO	Vac: OFF Occ: SD/OFF	Vac: LD*-OFF Occ: SD/HD	*Low Dim during Time Off delay
OFF	Vac: OFF Occ: OFF	Vac: OFF Occ: OFF	Light stays off

ON/OFF : ON-OFF Switching

OSO : Occupancy Sensing Only

OSLA : Occupancy Sensing at Low Ambient

OSLATO : Occupancy Sensing at Low Ambient with Time-Off

OFF : Light OFF all the time

Vac : Vacant **Occ** : Occupied

¹ While ambient light level is higher than the threshold.

² While ambient light level is lower than the threshold.

MOUNTING OPTIONS

The MRD-510Sx series can be mounted into the ceiling, attached to a fixture or mounted into a junction box. Codes F and W allow the MRD-510Sx to be directly integrated with OEM light fixtures in any environment.

Code	Mounting Option	Mounting Bracket
F	Fixture Integrated	---
W	IP-66 Fixture Integrated	---
E	Fixture External	EMB-500
P	IP-66 Fixture External	PMB-500
S	Ceiling Surface	SMB-500
C	Junction Box	CMB-500
L	Ceiling Recess	LMB-500


LENS OPTIONS

The MRD-510Sx series is available with following lens options which provide different coverage at different mounting heights (H).


Lens	Shape	Mounting Height	Coverage
A	Standard	Cone	8~15 ft. 2.4~4.5m 2X height
B	Extra wide	Cone	8~10 ft. 2.4~3.0m 6X height
C	High bay	Cone	15~30 ft. 4.5~9.0m 3X height
D	Standard	Round	8~20 ft. 2.4~6.0m 2X height
F	Extra wide	Dome	8~20 ft. 2.4~6.0m 4X height
G	Aisle way	Arch	8~40 ft. 2.4~12.0m 3X height
H	High bay	Dome	30~50 ft. 9.0~15.0m 1X height
L	Long aisle	Arch	8~10 ft. 2.4~3.0m 6X height

WIRING DIAGRAM

Powered by line voltage (DALI bus power enabled)

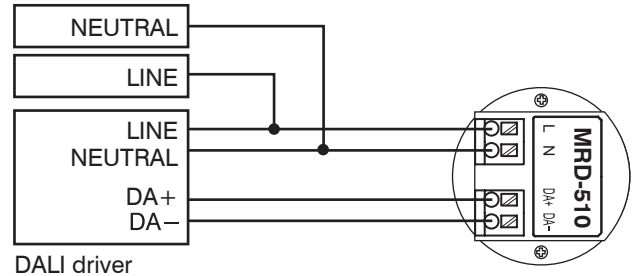

Powered by DALI bus

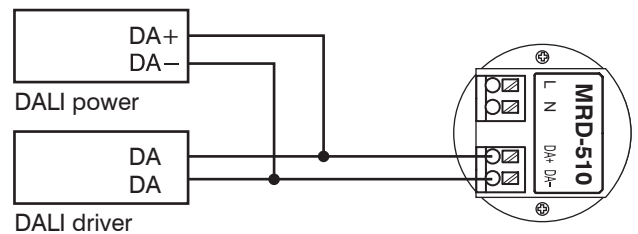

SPECIFICATIONS

Power supply	230-240VAC or DALI bus power
Power consumption	<0.5W @230VAC or <15 mA with DALI bus
Infrared sensor	Omni-directional pyroelectric
Photo sensor	Digital ambient light sensor
DALI bus power	100 mA max.
Control protocol	DALI Broadcast
Detectable speed	0.3 ~ 3 m/sec. (1~10 ft/sec.)
Mounting height	Subject to the lens applied
Detection range	Subject to the lens type and mounting height
Remote range	10 m (33 ft) typical, indoor, no backlight
Op. humidity	Max. 95% RH
Op. temperature	-40°C ~70°C (-40°F~158°F)
Dimensions	Ø60 x H37mm (Ø2.36" x H1.45")