

OVERVIEW

The ON-PBD-815W is an optional device of IR-TEC's OS-NET wireless mesh network solution. This device is exclusively designed to replace an existing wall switch/dimmer to broadcast manual on/off/dim control commands to the assigned group lighting, while also function as a network node.


This sleek, low profile OS-NET device can be mounted into a standard EURO wall box, operated by line voltage power, and provide wireless control to the grouped lighting as required. Each ON-PBD-815W can be assigned to control up to 4 lighting groups via a 2-way handheld remote programmer.

A short press at upper/lower position of the button will transmit a command to switch on/off the lighting of groups assigned. Press and hold at upper/lower position of the button will increase/decrease the output level of controlled lighting respectively. A screwless snap-on wall plate is supplied to create a modern, high-end appearance for all spaces. By grouping the ON-PBD-815W with OS-NET sensors and controllers, you can effortlessly achieve an energy-efficient, code-compliant smart lighting control through a state-of-the-art wireless sensor mesh network with manual controls capability for presentation or special event.

FEATURES

- 230VAC line voltage power operating
- Low profile mounting with standard EURO box
- Screwless snap-on wall plate supplied
- Dual-color LED to indicate network connection
- Can be assigned to control up to 4 lighting groups

DIMENSIONS

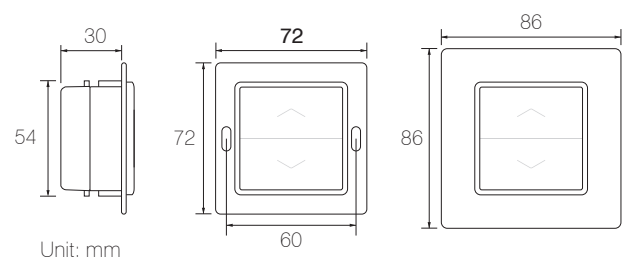


SPECIFICATIONS

Power voltage	230VAC, 50/60 Hz
Wireless protocol	Modified Zigbee Light Link (ZLL)
Radio frequency	2.4 GHz
Radio range	Typical *15 m @indoor
Op. humidity	Max 95% non-condensation
Op. temperature	-10°C ~ 50°C (-14°F ~ 122°F)
Dimensions	72H x 72W x 38D mm (w/mounting plate)

*Actual radio range may differ depending on environmental conditions.

WIRING DIAGRAM

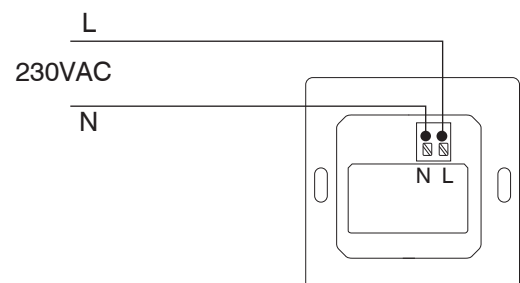

APPLICABLE REMOTE (order separately)

Model	Description	Remarks
SRP-281	OS-NET Remote Programmer	Full functionality